

PT-500 Submersible Liquid Level Transmitter



The PT-500 is a rugged submersible pressure transmitter designed for tank liquid level measurement, water and wastewater applications, well depth measurement, and offshore water depth measurement.

Features

- Simple to install
- High precision, solid state signal: 4-20 mA or RS-485 Modbus/RTU
- Exclusive, removable and reusable cage
- 1/2" NPTM on cable end for use with conduit
- cCSAus hazardous location approved
- Durable transducer face

Datos fiscales:


Corporación Eco Industrial y Comercial S.A de C.V.
Plan de San Luis # 101 Int. 801 Col. El Coecillo
León, Gto. C.P. 37260

Oficina de Ventas:

Cd. de México
Cd. de Querétaro
Nextel

Tel (55) 5510-4265
Tel (442) 212-8075
Tel 01 (442) 413 7630
Tel 01 (442) 410 1565

PT-500 Specifications

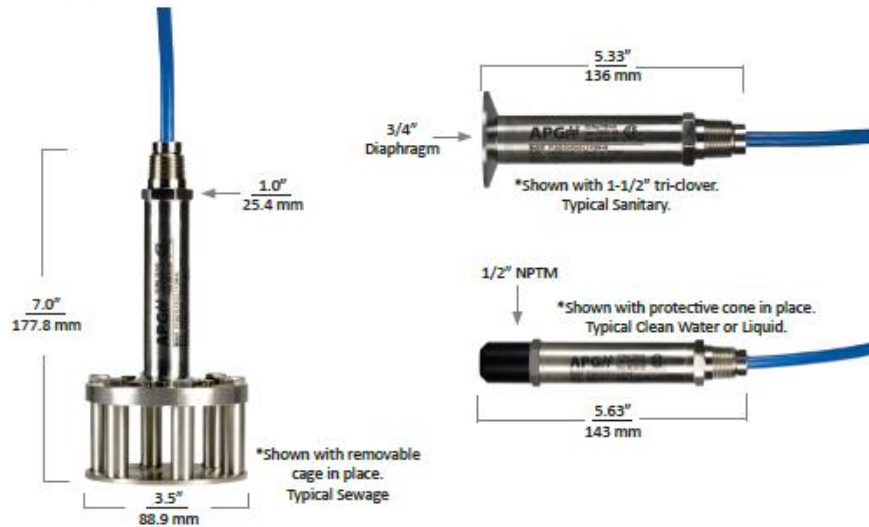

Performance

- Accuracy (linearity, hysteresis, & repeatability): up to 0.10% of span (B.F.S.L.)
- 1 Year Stability: $\leq 0.75\%$ of span
- Temp Compensation Range: 32° - 122°F (0° - 50°C)
- Temp Effects on Zero & Span: $\leq 0.025\%$ FS/°F @ 70°
- Frequency Response: Less than 5mS

Connectivity

- Output: 4-20 mA 0-5V mV/V
Modbus/RTU (RS-485)- with temp. output

Environmental

- Maximum Depth: Submersible up to 462.2 ft. (300 psig)

Certification

- CSA Intrinsically Safe: (4-20 mA only)
Class 1, Division 1; Groups C & D
Ex ia IIB T4
Class 1, Zone 0, AEx ia IIB T4
Ambient: -40 - 85°C
- U.S. Patent No. 7,787,330

Electrical

- Supply Voltage: 10-28 VDC
- Electrical Connection:
 - Vented watertight cable w/free ends
 - Non-vented cable
Up to 200 lbs tensile strength
- Electrical Protection: Lightning and Surge protection is built in. Protected against reverse polarity, surge per IEC 61000-4-5



Physical

- Housing: 316L SS
- Cable: Urethane PVC Hytrel
- Protective Cone: Delrin
- Overmolded Cable
- Removable or Permanent Anti-snag Cage

Datos fiscales:

Corporación Eco Industrial y Comercial S.A de C.V.
Plan de San Luis # 101 Int. 801 Col. El Coecillo
León, Gto. C.P. 37260

Oficina de Ventas:

Cd. de México
Cd. de Querétaro
Nextel

Tel (55) 5510-4265
Tel (442) 212-8075
Tel 01 (442) 413 7630
Tel 01 (442) 410 1565

PT-500 Submersible Pressure Transducer

Robust from Top to Bottom

Automation Products Group, Inc. brings you the highest quality submersible on the market.

The PT-500 is the only transducer that can be adjusted in the field, and the only one that offers a removable cage. The high quality build is simply unmatched.

Give us a call at (888) 525-7300 to learn more.



1/2" NPT Fitting

- Mount to a conduit pipe
- Hang from a steel wire
- Saves cable from wear
- Avoid interference with pumps

CSA Class 1, Div 1

- Safe for operation around flammable gas

Field Adjustable

- Adjust zero point with simple magnet
- Magnet provided with the sensor
- Don't have to send to the manufacturer for simple adjustments

Durable Transducer Face

- Can be handled freely
- Will not be damaged from simple touch
- State-of-the-art MEMS transducer

High Strength Cable

- Custom made to our spec
- High tensile strength with Kevlar®
- Safe transducer ventilation

Laser Welds

- Superior laser welds
- Extremely durable
- No cracks or leaks

Built-In Surge and Lightning Protection

- No surge-protector necessary
- Protection built right into the sensor
- IEC 61000-4-5 compliant

Automatic Temp. Compensation

- Embedded temperature sensor
- Automatic compensation

Patented Re-Usable Cage

- Only re-usable cage on the market
- Keeping the cage saves money on replacement sensors



*Kevlar® is a registered trademark of E.I. du Pont de Nemours and Company

Datos fiscales:

Corporación Eco Industrial y Comercial S.A de C.V.
Plan de San Luis # 101 Int. 801 Col. El Coecillo
León, Gto. C.P. 37260

Oficina de Ventas:

Cd. de México
Cd. de Querétaro
Nextel

Tel (55) 5510-4265
Tel (442) 212-8075
Tel 01 (442) 413 7630
Tel 01 (442) 410 1565